


KITOTKARA




75 inch Interactive Flat Panels for Education & Business



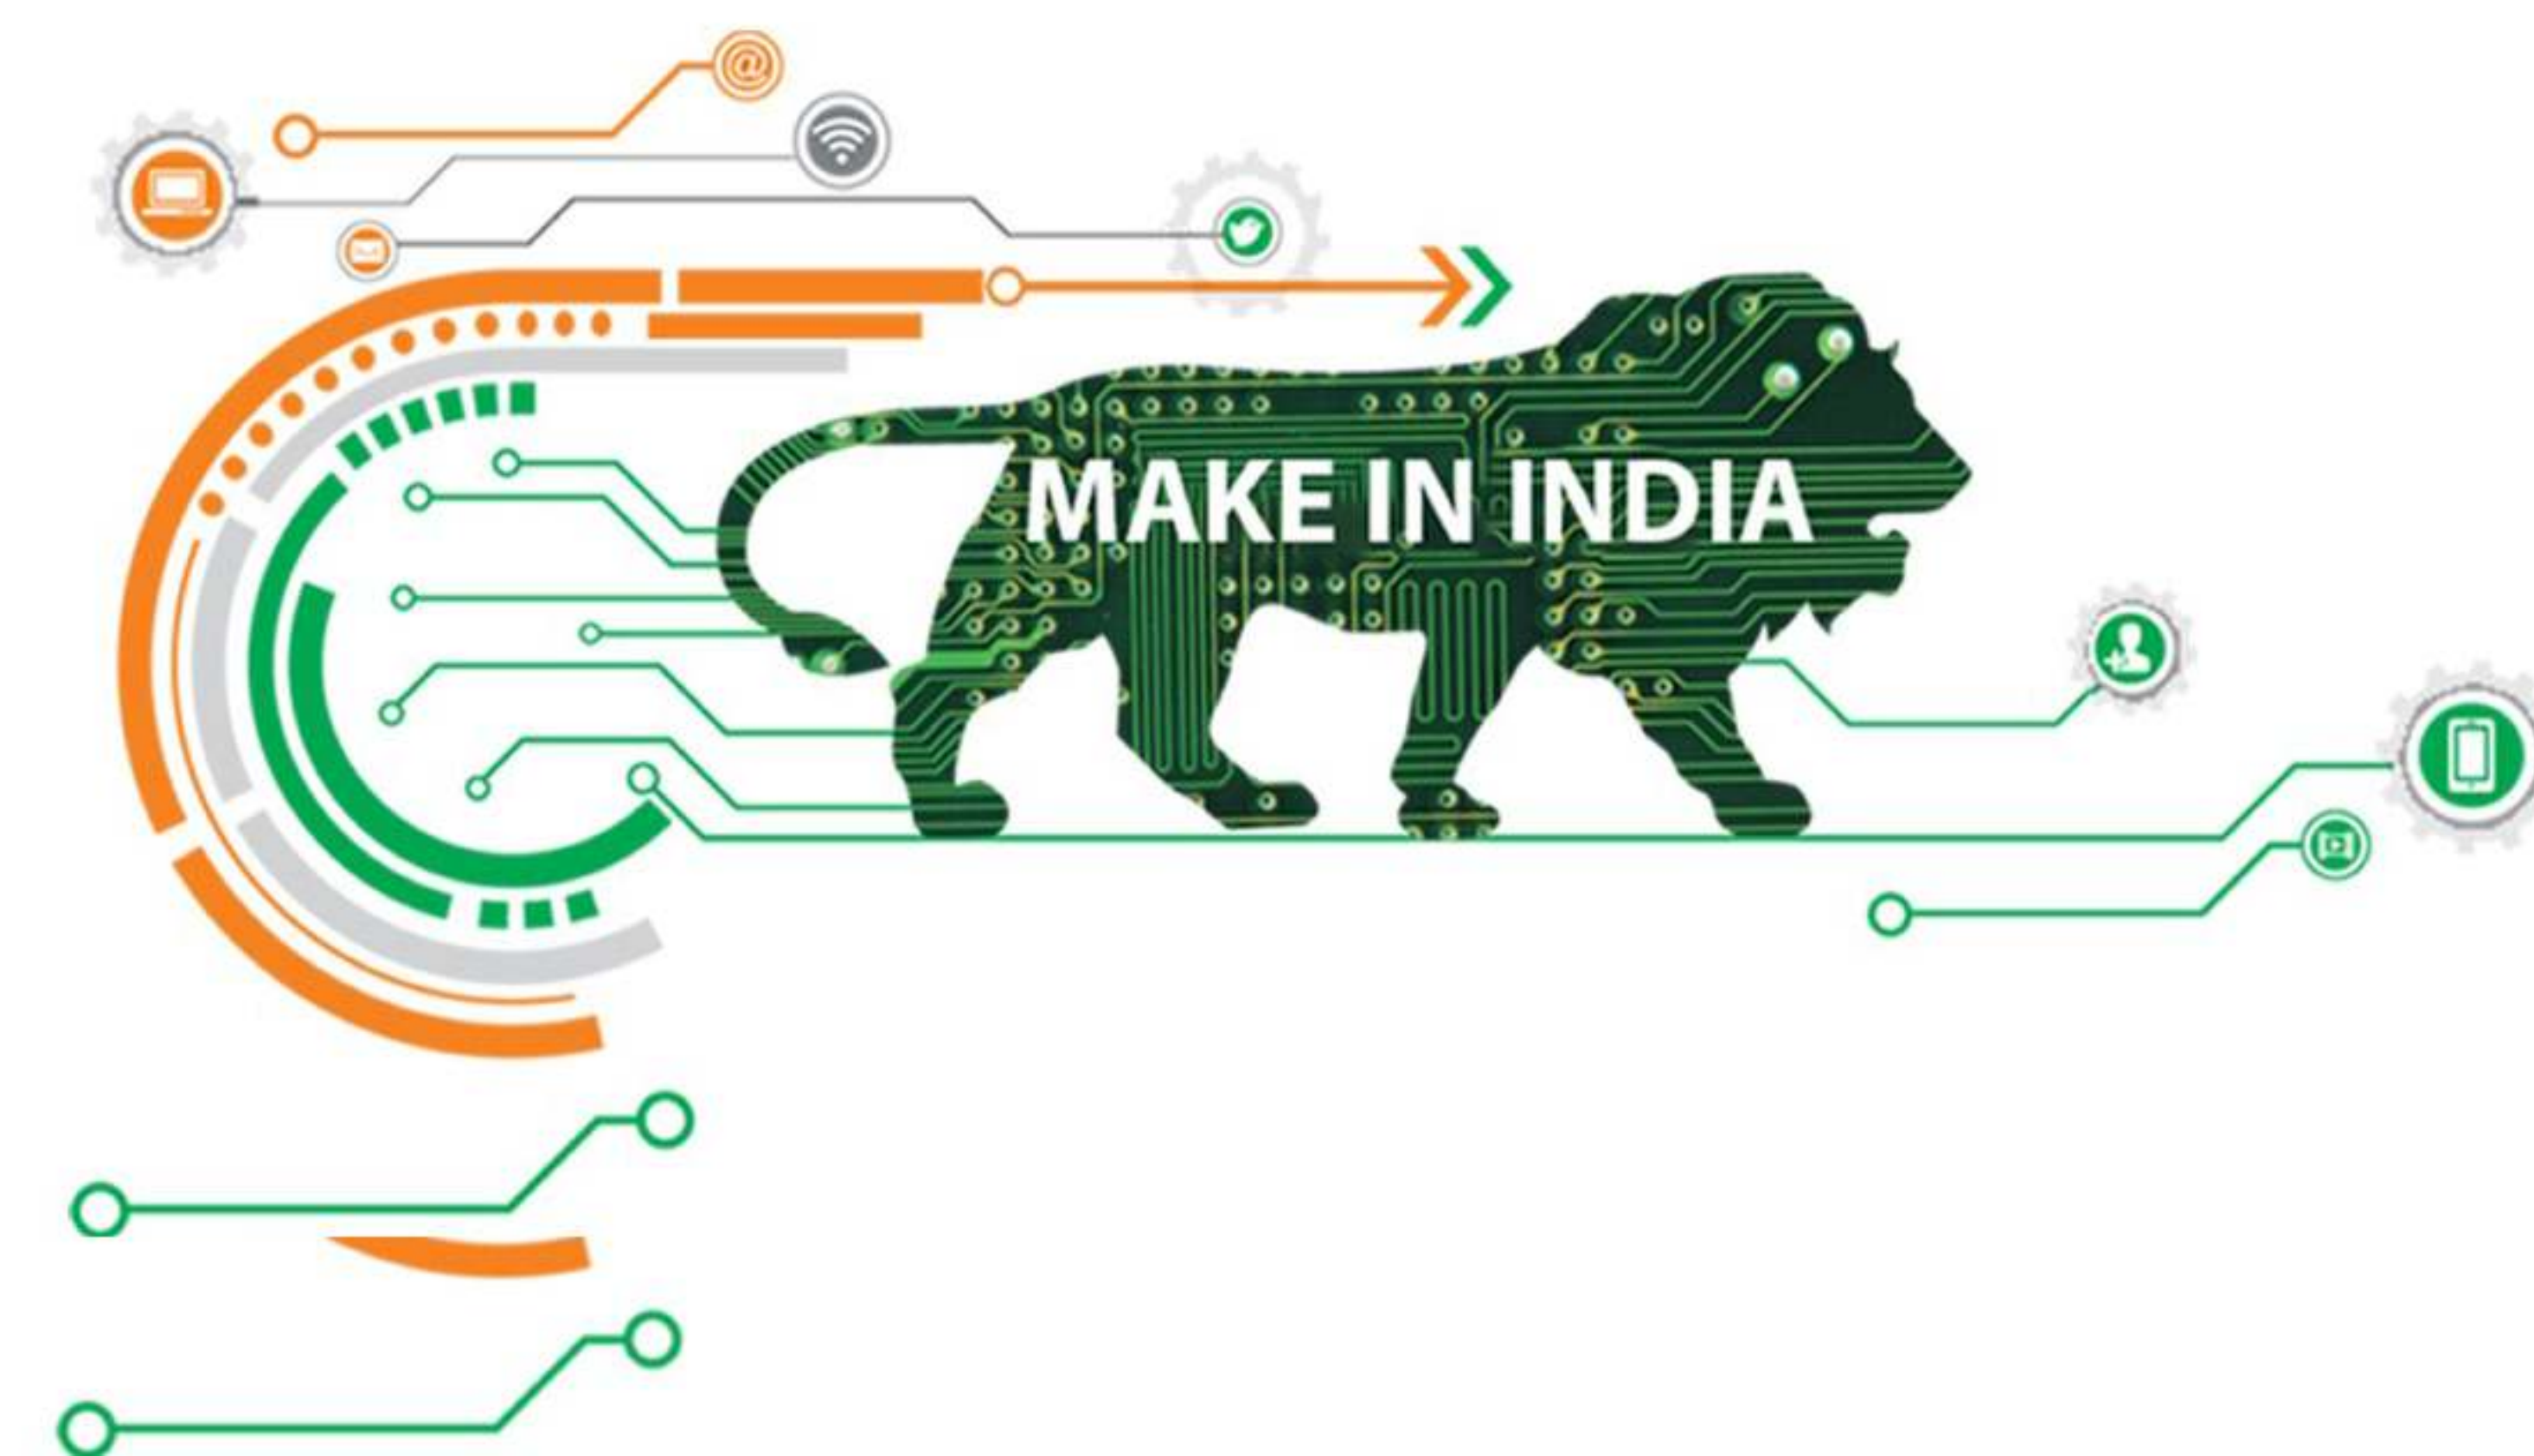

A+ Display Panel

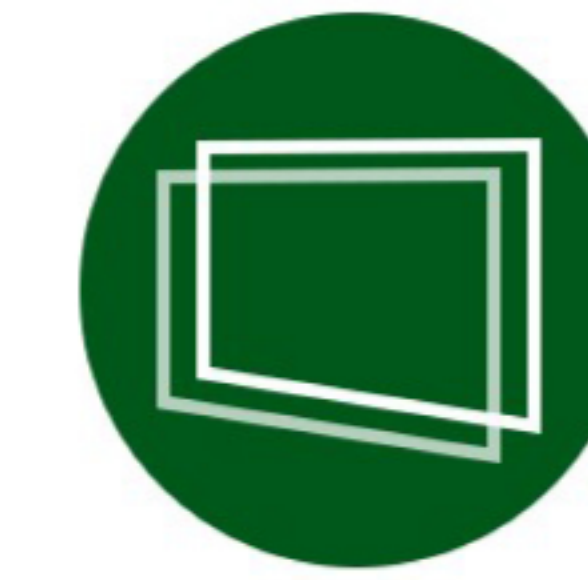

Zero bonding Display



*In-built Wi-Fi,
Ethernet*



In-built Bluetooth



*4 mm unbrakebale
toughn glass*



*4K Ultra HD
Display Resolution*



*Energy saving
design*



*Powerfull sound using
2 front facing speakers*






Easy wireless connectivity with laptop and mobail devices.



Support any Pen as small as tip




*Android 9.0/11.0
4 GB or 32 GB*

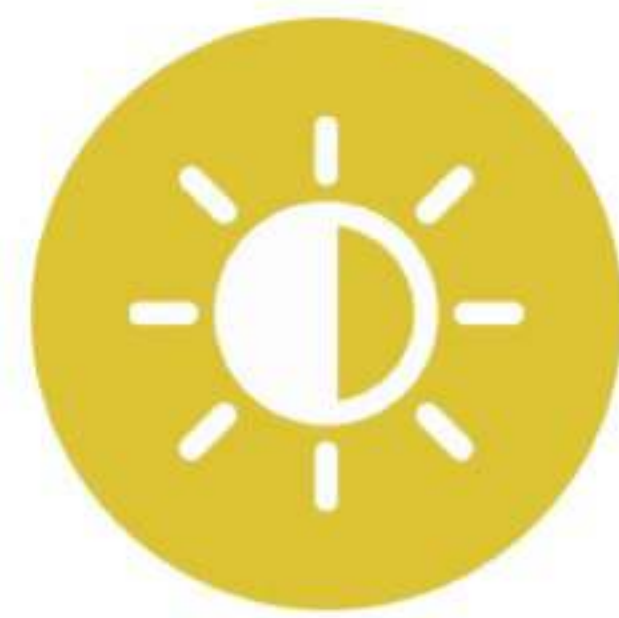

*Super bright LED
Display*



*4K Ultra HD
White Board*

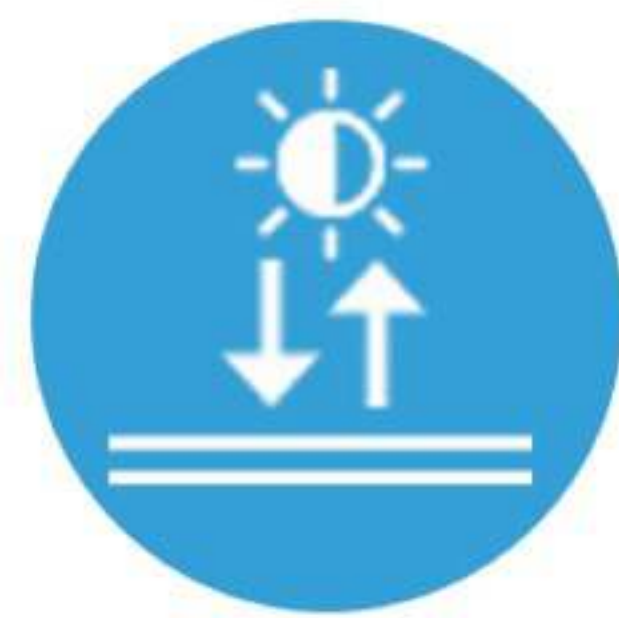

*Anti-glare coating
to absorbe upto 80%
of light*





Screen Recording

Teachers can record, save, replay and share the entire lesson conducted on the smart digital screen with the Audio and video files.



Endless Canvas

Write endlessly on the smart board without creating new page you can continuously write onboard. Auto scrolling function creates additional space at the end of the canvas



Indian Language Compatible

digital interactive intelligent panel support multiple indian languages for education. It is compatible with menu recognition and dictation accordingly



Multi Finger Gesture Control

Draw, select, draw, rotate and erase by using the multi-point touch gesture control like palm erase multi touch support, longpress, multi-finger swip etc.

Product Parameters

specificatio	type	parameter	
Panel	LCD Size	75"	
	Light source	LEDbacklight	
	Resloution	3840 x 2160pixels	
	Brightness(typ)/(min)	350cd/m ² (typ.)	
	Contrast ration(typ)/(min)	1200:1(typ.)	
	Response time(typ)/(min)	8ms(typ.)	
	Pixel distance	0.372mm x 0.372mm	
	Frame rate	60Hz	
	Viewing Angle	178°(H)/178°(V)	
	Life(typ)/(min)	30,000hrs(min.)	
	Color saturability(x%NTSC)	68%	
	Display area	1646.5 (H) *924.7 (V) mm	
	Display colors	1.07b	
Android	CPU	CPU	Quad-core A55
		Frequency	1.5GHZ
		GPU	Mali G52
	RAM	3/4 GB	
	ROM	32 GB	
	Chipset	Hi3751V560	
	System Version	9.0/11.0	
Power	Voltage	Rated	
	Max power consumption	≤250W	
	Standby power consumption	< 0.5W	
	Speaker	2 x 15W	
	Power supply (AC) input	100-240V	
	Power switch	Ship type switch	
Environmen	Working temperature	0°C ~ 40°C	
	Storage temperature	-20°C ~ 60°C	
	Working humidity	10%~90%No condensation	
In Interface	RJ45	1	
	HDMI	1	
	HDMI(ARC)	1	
	VGA	1	
	MIC	1	
	PC Audio	1	
	USB 2.0	2	
Out Interface	TOUCH-USB	USB Type B x 1	
	RS232	1	
	EARPHONE	1	
	COAX	1	

specificatio	type	parameter
Front interface	USB2.0	1
	USB3.0	1
	TOUCH-USB	1
	HDMI	1
Front button	7 buttons control	ECO,MENU,HOME,POWER,VOL-,VOL+SOURCE
Structure	Net weight	59kg
	Gross weight	80kg
	Product dimensions	1736.2 mm *1070.9mm*111mm
	Packing dimensions	1888*1200*255mm
	Shell color	black
	VESA hole site	4-M6screws hole400 x 400 mm
language	OSD	CH、 En
Touch Panel	Touch specifications	infrared touch sensor technology, support 20 points
	Glass	4MM
	Glass transmittance	> 92%
	Frame material	Aluminium alloy face frame, PCBA
	Response time	Single point : Click 13ms continuous 3ms Multipoint : Click 13ms, continuous 5-10ms Two touch at the same time: click 10ms
	Positioning accuracy	≤2mm
	Input method	opaque objects (such as fingers, pens, etc.)
	Theoretical clicks	more than 60 million times in the same position
	Min touch	≥ 5MM
	Light resistance	Incandescent lamp (220V, 100W), vertical distance above 350mm, the illuminance of solar radiation reaches 90000Lux
	Power supply	USB(USBPower supply)
	Supply voltage	DC 5.0±5%
Accessory	Remote-control unit	1
	Power line	1 (1.5M)
	WhiteBoard marker	1
	Instruction book	1
	Warranty card	1
	Certificate of qualification	1
	Battery	1(pair)
	WIFI Line	1